



EFFE 3TI
PACKAGING TECHNOLOGIES

PROTECTING YOUR PRODUCTS ... AN EASY GAME

SPINNY S2300

AUTOMATIC WRAPPING MACHINE



PACKAGING
TECHNOLOGIES
MADE IN ITALY



EFFE 3 TI srl | GATTINARA (VC) ITALY | Tel. +39 0163 828911 | Fax +39 0163 828990
info@effe3ti.com | www.effe3ti.com

EFFE 3 TI PRESENTS THE AUTOMATIC WRAPPING MACHINE

SPINNY S2300

A MACHINE ESPECIALLY DESIGNED FOR AUTOMATIC PACKAGING LINES, FULLY CUSTOMIZABLE AND WITH CUT & WELD SYSTEM.

MAIN FEATURES

Spinny S2300, the fully automatic wrapping machine with rotating table, is equipped with a motorized pre-stretch system that allows a sensible saving of film while wrapping. The machine has 10 password protected programs and a Touch-Screen control panel.

- Standard pre-stretch up to 300%
- Pallet height detection with photocell
- Variable speed of film carriage completely customizable
- Working cycle controlled by PLC
- All motors are controlled by inverter



PRE-STRETCH SYSTEM = ECONOMIC ADVANTAGE

All models are equipped with an high-performance **MOTORIZED PRE-STRETCH SYSTEM**.

The power pre-stretch is a special device which allows the best utilization of the stretch film quantity; moreover, it permits to wrap light and unsteady pallets that couldn't be wrapped with different frictioning systems.

The stretch film is supplied in the right quantity by the rollers that are operated by a motor, which is controlled by an electronic system that measures the speed and keeps the film tension constant on the whole pallet's surface.

The motorized pre-stretch system, allows an efficiency of film up to **300%**.

FILM SAVING



SPINNY DUAL MOTOR GIVES YOU EVEN MORE!

The **DUAL MOTOR** version is designed to let you save even more film, obtaining more economic advantages.

Based on the same principle of the single motor version, with the **DUAL MOTOR** system, SPINNY S300 offers variable stretch factor up to **400%**!

FILM SAVING





CONTACT US FOR ALL VERSIONS AND ACCESSORIES


SOME EXAMPLES?

PRESS

Available on all the models, the PRESS version is the perfect solution for wrapping unstable or special loads. Depending on your needs, the press unit can be motorized or pneumatic.

TOP SHEET DISPENSER

The best way to complete your wrapping line, with the better protection for your products is the New Top Sheet Dispenser MF2000

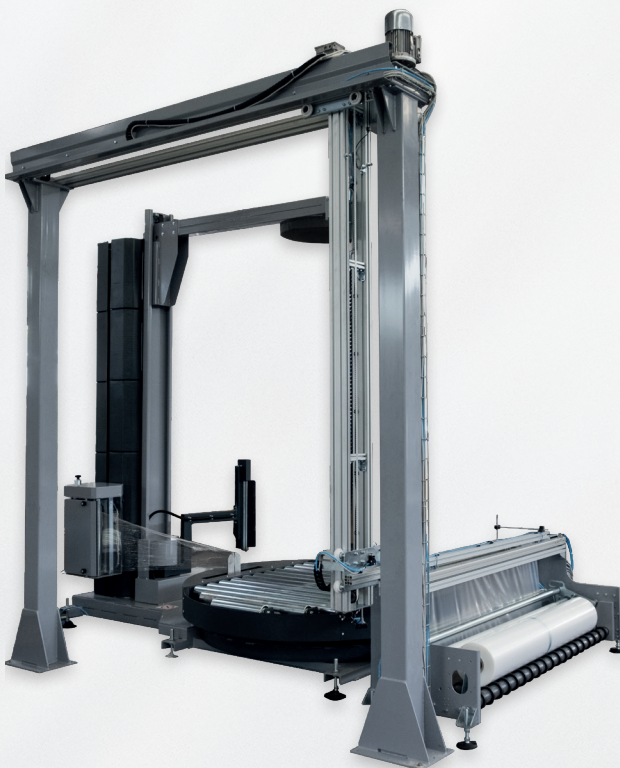

CALL US +39.0163.828911
or visit our Website www.effe3ti.com

TECHNICAL DATA


- The standard machine is designed to wrap palletted loads with stretch plastic film having the dimension up to 1200 mm (L) X 800 mm (W), with a load capacity of 1200 kg.
- The turntable is also available with a diameter of 1500 mm, 1650 mm, 1800 mm and 2200 mm with a load capacity of 2000 kg.
- The column can be furnished to wrap pallets with heights of 2100 mm, 2600 mm and 3100 mm.
- Table rotation speed and film carrier speed are regulated by inverter (turntable can rotate at a speed from 5 to 10 RPM).

ELECTRICAL SUPPLY

- Tension: 230 V single phase or, on demand, 400-415 V triple phase $\pm 10\%$
- Frequency: 50 Hz
- Installed power: 1,3 kW
- Auxiliary energy supply: 24 V DC

FILM (LLDPE) AND COIL CHARACTERISTICS

- Thickness: 15 ÷ 40 μm
- Advised thickness: 20 μm
- Internal coil diameter: 76 mm
- Height: 500 mm
- Maximum film roll weight: 16 kg
- Maximum external coil diameter: 250 mm



www.effe3ti.com

www.youtube.com/effe3ti
www.facebook.com/effe3ti

